



(43) International Publication Date
14 April 2005 (14.04.2005)


PCT

(10) International Publication Number
WO 2005/032723 A1

- | | |
|--|--|
| <p>(51) International Patent Classification⁷: B04B 5/12,
B01D 45/14</p> <p>(21) International Application Number:
PCT/SE2004/001429</p> <p>(22) International Filing Date: 6 October 2004 (06.10.2004)</p> <p>(25) Filing Language: Swedish</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
0302648-1 7 October 2003 (07.10.2003) SE</p> <p>(71) Applicant (for all designated States except US): 3NINE
AB [SE/SE]; P.O. Box 1163, S-131 27 Nacka Strand (SE).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): LAGERSTEDT,
Torgny [SE/SE]; Döbelnsgatan 89, S-113 52 Stockholm</p> | <p>(SE). INGE, Claes [SE/SE]; Kristinavägen 15, S-131
50 Saltsjö-Duvnäs (SE). FRANZÉN, Peter [SE/SE];
Månstorpssvägen 22, S-146 45 Tullinge (SE). MAEHANS,
Olev [SE/SE]; Plåtslagarvägen 66, S-146 36 Tullinge (SE).
SANDGREN, Martin [SE/SE]; Landåvägen 12, S-131 49
Nacka (SE).</p> <p>(74) Agent: ALBIHNS STOCKHOLM AB; Linnégatan 2,
P.O. Box 5581, S-114 85 Stockholm (SE).</p> <p>(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.</p> |
|--|--|

[Continued on next page]

(54) Title: CENTRIFUGAL SEPARATOR FOR CLEANING GASES

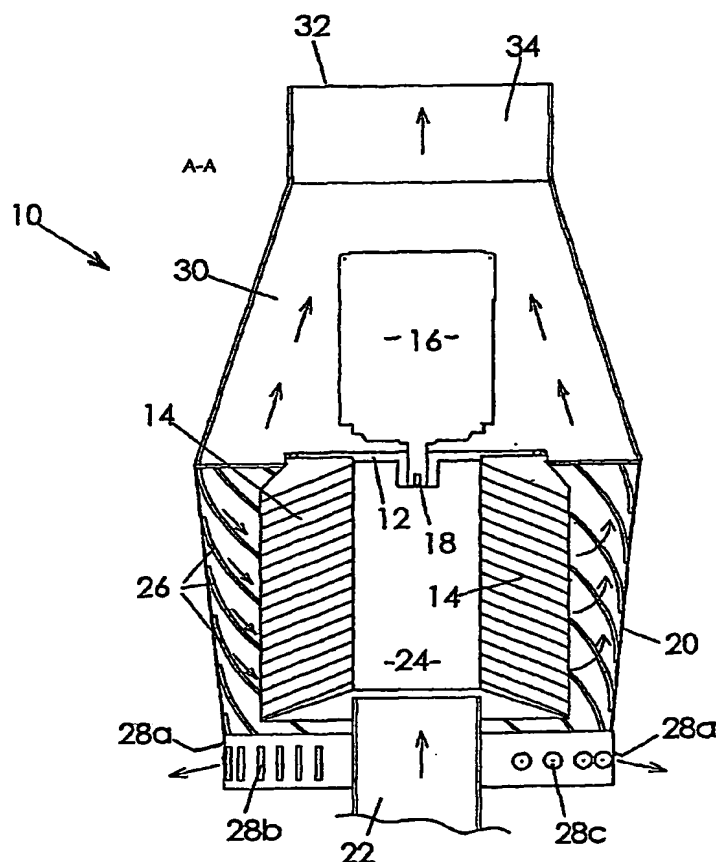

(57) Abstract: A centrifugal separator device (10) for separating solid and/or liquid particles which are suspended in gas media, which device comprises a rotor (12) which is provided sedimentation members (14), which is rotatably mounted in a surrounding stationary housing (20) and which has a central inlet for the gas medium which is to be cleaned. The housing (20) has, on the one hand, an outlet (32) for cleaned gas which, during its passage through the sedimentation members (14) in the rotor (12), has been freed from solid and/or liquid particles, and, on the other hand, an outlet (28 a-c) for solid and/or liquid particles which have been transferred onto the inner side of the housing. A number of parallel guide rails (26), which run helically, are arranged on the inner side of the housing and extends axially at least over a major part of the length of the rotor (12), and the outlet (32) in the housing for cleaning gas is located, with respect to the axis, at one end of the rotor (12) while the outlet (28 a-c) for the particles which have been collected on the housing wall is located at the opposite axial end of the rotor. The guide rails (26) are arranged in a direction on the inner side of the housing in relation to the direction of rotation of the rotor which is such that a peripherally outer of a gas vortex generated by the rotor is forced to entrain the particles which have been collected between the guide rails toward the particles outlet.



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report